ameyxgs.com

Zhengzhou Amier Trading Co., Ltd.
Address: No. 99 University Road,
Erqi District, Zhengzhou City,
Henan Province
E-mail: zzamier@yeah.net
Website: https://ameyxgs.com
Phone: +86 15617555950

公司名称：郑州阿米尔贸易有限公司
公司地址：河南省郑州市二七区
大学路99号
电子邮箱：zzamier@yeah.net
公司网址：https://ameyxgs.com
电话：+86 15617555950

AMEYXGS
ARCHERY

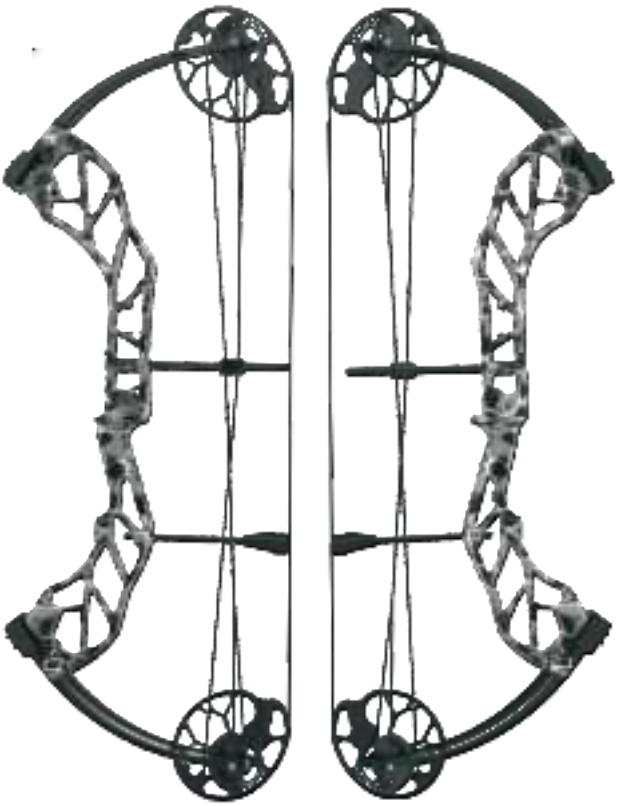

Compound Bow Owner's Manual

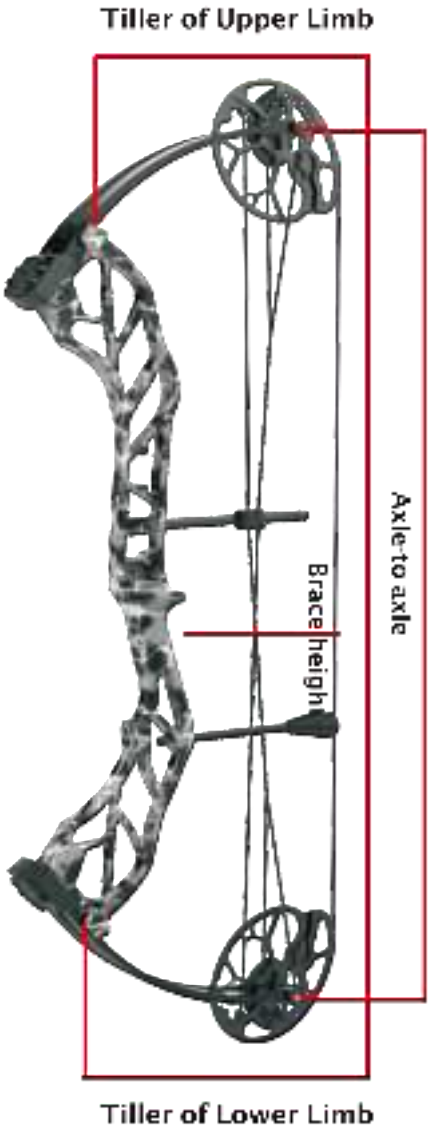

BOW BASICS

Axle to Axle is the length of the bow measured from the center of one cam axle to the other.

Brace height is the distance between the string and the pivot point of the bow grip(see pic position of the bow grip).

Tiller is a measurement of the vertical distance between the limb pocket and string.

Please Read This Owners Manual Thoroughly For Usage Instructions And Safety Guidelines

Before Using This Equipment, Please Abide By All Of The Following Safety Guidelines And Warnings.Consult Your Authorized AMEYXGS Archery Retailer With Questions.,

To Insure Your Personal Safety And The Safety Of Those Around You,It Is Necessary That You Read,Understand And follow All Warnings And Safety Precautions Prior To Using Or Working On Your Bow Or Any Archery Equipment Used With The Bow.

Warning

1. This Bow Is Intended Strictly For Recreational Use Only, The Warnings That Follow Are Specifically Directed To The Use Of The Bow;

2. Always Inspect All Accessories And Components Before Use The Bow. Carefully Inspect the Condition Of The Bowstring ,Cables, String Servings, Nocking Point Or String Loop. Carefully Inspect That The Limbs, Cams And Riser Are In Proper Condition And Orientation. Always Keep Your Bow String And Cables Waxed. Damaged parts Or not Installed In place May Inflict Serious Injury To Yourself And Those Around You.

3. Make Sure That There Are No People, Livestock, Buildings, Roads Or Other Objects Behind Or Near Your Target, Be Sure That Your Backstop Is Large Enough To Catch A Stray Arrow And That Is Thick Enough That The Arrow Can Not Completely Penetrate Through It;

4. Topoint Archery Incorporated Shall Not Be Liable For Injuries Suffered Or Caused By Misuse, Unsafe Or Improper Arrow And Bow Combinations Or For Injuries Sustained When Using An Altered Or Modified Bow Or By Unconventional Use;

5. Never Work On, Or Attempt To Shoot Your Topoint Archery Bow While On Medication Or Under The Influence Or While Consuming Drugs Or Alcohol, That May Impair Your Judgment, Physical Abilities, Or Reflexes. Doing So Can Result In Damage To The Bow, Inflict Serious Injury Or Even Death.

6. Always Shoot The Recommended Minimum Arrow Weight. Do Not Shoot An Arrow Weighing Less Than Five Grains For Every Pound Of Draw Weight. For Example, If Your Bow Is set At 70lbs Do Not Shoot An Arrow Weighing Less Than 350 Grains. Shooting An Arrow Below Five Grains Perpound Of The Bows Draw Weight Can Cause Damage To Your Bow And May Inflict Serious Injury To Yourself And Those Around You.

7. Do Not Draw The Bow Beyond Its Specified Draw Length and Never Shoot A Damaged Arrow. Shooting A Damaged Arrow May Inflic Serious Injury To Yourself and Those Around You.

8. Never Dry Fire Your Bow. Dry Firing Is When The Bowstring Is Equipped With Broadheads Around The Bows String And Cables. If a String Or Cable Is Cut or Frayed It Should Be Replaced Immediately. A Cut String Or Cable Can Result In Instantaneous Separation And May Inflict Serious Injury To Yourself and Those Around You.

AMEYXGS
ARCHERY

Celestial E8

IBO Rate	Up to 330 fps	IBO 箭速	Up to 330 fps
Physical Weight	3.85 lbs.	净　重	3.85 lbs.
Axle to Axle	31"	轮　距	31"
Brace Height	7"	弓满高度	7"
Let-off	75%	省力比	75%
Draw Weight	19-70 lbs, adjustable	拉　力	19-70 lbs, 可调节
Finish	Powder coating; Camo	表面处理	喷粉/迷彩处理
Draw Length	19-30", without draw press	拉　距	19-30", 免拉式设计
Cam	Dual/Adjustable,CNC machining, with ball bearing	凸　轮	双凸轮,可调节CNC机工，带轴承
String Length	57.68"	主弦长度	57.68"
Cable Length	33.938" X2	副弦长度	33.938" X2
Grip	Aluminum	握　把	平台型，与弓体一体

DRAW WEIGHT ADJUSTABILITY

You have the choice of draw weight from 19-70lbs.Draw weight adjustments can be made by turning the limb bolt counter -clockwise using an Allen wrench. It is important to adjust both limb bolts in equal amounts.

Do not exceed the recommended turns out from the maximum draw weight.

Maximum opening: 7 complete turns starting from closed position

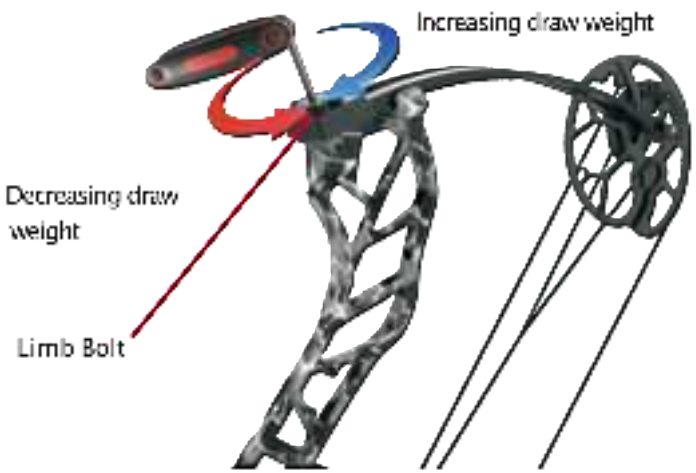

Dual cam

The is equipped with a dual cam wita large adjustment range for all ages and heights.The draw length adlustability range is from 19"-30"without a bow press.

To adjust draw length, remove the draw length screw from the module and rotate the draw module to the desired draw length hole. Reinsert the draw length screw, snug the screw into position and retighten (do not over tighten).Repeat this process on the second cam making sure both modules are set in the same draw length position.

Upper Cam :

Lower Cam :

How to fix the arrow rest & bow sight?

Use the wrench insert the screw like picture 1 fix the arrow rest on the riser

Like picture 2 screw off or adjust the arrow rest to left/right

Soft remind：The screws should be fix in the middle line hole like picture 3

Bow sight light: When it's dark around you，you can turn on the bow sight light to improve lighting brightness can improve your shooting accuracy.

Use the wrench insert the bow sight on the riser like picture 4

Like picture 5 screw off can adjust the bow sight up/down

Like picture 7 screw off can adjust the bow sight to left/right

Like picture 8 screw off can adjust the pins up/down

Storing And Maintaining Your Bow

Your AMEYXGS Bow Is A Precision Instrument That Requires Specific Tools And Expertise. Accordingly AMEYXGS Recommends That All Maintenance And Repair Of Your AMEYXGS Bow Be Performed By An Authorized AMEYXGS Retailer.Failure To Comply With This Warning May Cause Damage To Your Bow And May Inflict Serious Injury Or Even Death And May Void Your Warranty. AMEYXGS Shall Not Be Held Liable If This Warning Is Ignored.

NOTE: Always Keep Your Bow String And Cables Waxed;

NOTE: Never Expose Your Bow To Extreme Heat Or Prolonged Moisture. Avoid Storing Your Bow For Extended Periods Of Time In Areas Subject To Extreme Heat, Such As The Trunk Of A Vehicle Or In A Garage. Damage To Your Limbs, Strings, And Other Parts Of The Bow Caused By Extreme Heat May Not Be Covered Under The Manufacturer's Lifetime Warranty;

NOTE: If Your Bow Becomes Exposed To Moisture, Be Sure It Is Completely Dry Before Storing It. Do Not Use Solvents, Sprays Or Cleaners Such As Acetone Or Mineral Spirits, On Or Around Your Bow, As They May Adversely Affect The Finish. Rather, Use A Damp Cloth To Clean.

AMEYXGS Lifetime Warranty

LIMITED LIFETIME WARRANTY: Your AMEYXGS Bow Is Warranty Against Defects In Materials And Workmanship To The Original Registered Owner When Purchased At An Authorized Retailer,For The Life Of the Original Owner.

This Includes All Bow Parts Except The String And Cosmetic Appearance(chips, dings,scratches) caused By Normal Use And Wear. All Warranty Claims Are Processed Through An Authorized .Your Authorized Retailer Will Contact A Warranty Technician On Your Behalf. Any And All Warranties,Written Or Implied, Are Void With Any Alterations To The Bow, Including Cosmetic Refinishing.

LIMITATION OF LIABILITY: shall Not Be Liable for Any Special Or Consequential Damages That Result Fromthe Performance And Use Of The Products.Has Been Advised Of The Possibility Of Such Damages. Applicable Law May Not Allow The Limitations Of Exclusion Of Liability Or Incidental Or Consequential Damages, So The Above Limitation Or ExclusionMay Not Apply To You.

NOTE: Celestial Eli Reserves The Right To Make Substitutions On Warranty Coverage For Any Reason, Including But Not Limited To Available Parts And/or Camo Pattern. Authorized Celestial Eli Retailers May Charge For Warranty Work Performed. Limited Lifetime Warranty To The Original Owner.